

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free


FEATURES

- General Purpose Switching and Amplification

TO-92


CLASSIFICATION OF h_{FE}

Product-Rank	2SB1426-P	2SB1426-Q	2SB1426-R
Range	82~180	120~270	180~390

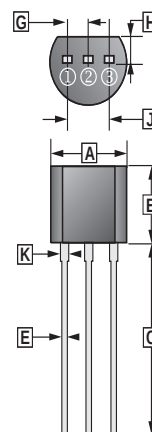

① Emitter
② Base
③ Collector

REF.	Millimeter	
	Min.	Max.
A	4.40	4.70
B	4.30	4.70
C	12.70	-
D	3.30	3.81
E	0.36	0.56
F	0.36	0.51
G	1.27 TYP.	
H	1.10	-
J	2.42	2.66
K	0.36	0.76



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-20	V
Collector to Emitter Voltage	V_{CEO}	-20	V
Emitter to Base Voltage	V_{EBO}	-6	V
Collector Current - Continuous	I_C	-3	A
Collector Power Dissipation	P_C	0.75	W
Thermal Resistance From Junction to Ambient	$R_{\theta JA}$	166	$^\circ\text{C} / \text{W}$
Junction, Storage Temperature	T_J, T_{STG}	150, -55~150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test condition
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	-20	-	-	V	$I_C = -0.05\text{mA}, I_E = 0$
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	-20	-	-	V	$I_C = -1\text{mA}, I_B = 0$
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	-6	-	-	V	$I_E = -0.05\text{mA}, I_C = 0$
Collector Cut-Off Current	I_{CBO}	-	-	-0.1	μA	$V_{CB} = -20\text{V}, I_E = 0$
Emitter Cut-Off Current	I_{EBO}	-	-	-0.1	μA	$V_{EB} = -5\text{V}, I_C = 0$
DC Current Gain	h_{FE}	82	-	390		$V_{CE} = -2\text{V}, I_C = -0.1\text{A}$
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	-	-	-0.5	V	$I_C = -2\text{A}, I_B = -0.1\text{A}$
Collector-Base Capacitance	C_{cb}	-	35	-	pF	$V_{CB} = -10\text{V}, I_E = 0, f = 1\text{MHz}$
Transition Frequency	f_T	-	240	-	MHz	$V_{CE} = -2\text{V}, I_C = -0.5\text{A}, f = 100\text{MHz}$

*Pulse test