



VENTILADORES JIULONG

MUFFIN-AC MOD. G12038HA2BT-C-7 BALERO 230VCA 120X120X38mm

Size: 120mmx120mmx38mm

Airflow: 141~183m³/hr

83-108CFM

Weight: 480g

Noise: 38~46dBA

Impeller: PBT Thermoplastic Black, UL94-VO

Frame: Aluminum Alloy


Terminals: 0.5mm

Lead Wire: AWG#22 UL 1007 (Optional)

Motor: Shaded Pole Induction Motor

Safety: UL>CUL>TUV>CE> 

Operation Temperature: -10°C~+65°C

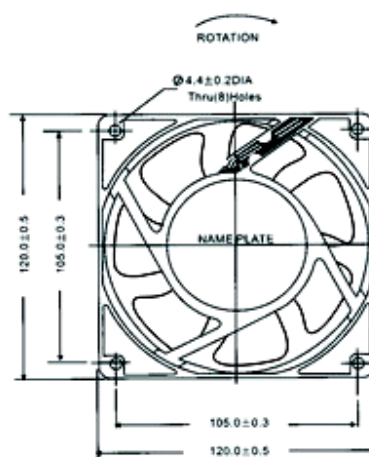

Model (型号)	Bearing System (轴承型式)	Voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
G12038HA,S-7P	Sleeve	100~125	50/60	0.28	24	2450/2800	42/46	156/183	92/108	1	/
G12038HA,S-7P		200~240	50/60	0.14	24	2450/2800	42/46	156/183	92/108	1	/
G12038HA,B-7P	Ball	100~125	50/60	0.28	24	2450/2800	42/46	156/183	92/108	1	/
G12038HA,B-7P		200~240	50/60	0.14	24	2450/2800	42/46	156/183	92/108	1	/
G12038MA,S-7P	Sleeve	100~125	50/60	0.22	20	2100/2500	38/43	141/161	83/95	1	/
G12038MA,S-7P		200~240	50/60	0.11	20	2100/2500	38/43	141/161	83/95	1	/
G12038MA,B-7P	Ball	100~125	50/60	0.22	20	2100/2500	38/43	141/161	83/95	1	/
G12038MA,B-7P		200~240	50/60	0.11	20	2100/2500	38/43	141/161	83/95	1	/

